

DORMA Automatics, Inc
 924 Sherwood Drive
 Lake Bluff, Illinois 60044
 Toll Free: (877)-367-6211
 Fax: (877)423-7999

THE STANDARD PACKAGE CONSISTS OF:
 THE AUTOMATIC SWING DOOR OPERATOR & HOUSING, ARM,
 CONTROLLER, MOUNTING HARDWARE, CONCEALED CONTROL
 PANEL (OFF, AUTO, HOLD-OPEN)

DRAWING DIMENSIONS ARE IN ENGLISH AND
 METRIC UNITS. METRICS ARE SHOWN IN
 MILLIMETERS, AS FOLLOWS: 1" (25.4)

STANDARD FINISHES: CLEAR BHMA 204
 DARK BRONZE BHMA 313





FOR MAXIMUM CURRENT DRAW, SEE PRODUCT
 SPECIFICATION OR INSTALLATION INSTRUCTIONS.

SPECIAL FINISHES ARE AVAILABLE

REFER TO APPLICABLE LOCAL, STATE OR NATIONAL
 BUILDING CODE FOR MINIMUM DOOR HEIGHTS AND
 WIDTHS FOR ALLOWABLE EGRESS REQUIREMENTS.
 SEE REFERENCE TABLE.

STANDARD OPERATOR SIZES

DOOR WIDTH	OVERALL OPERATOR WIDTH
72" (1829)	75" (1905)
84" (2133)	87" (2210)
96" (2438)	99" (2515)

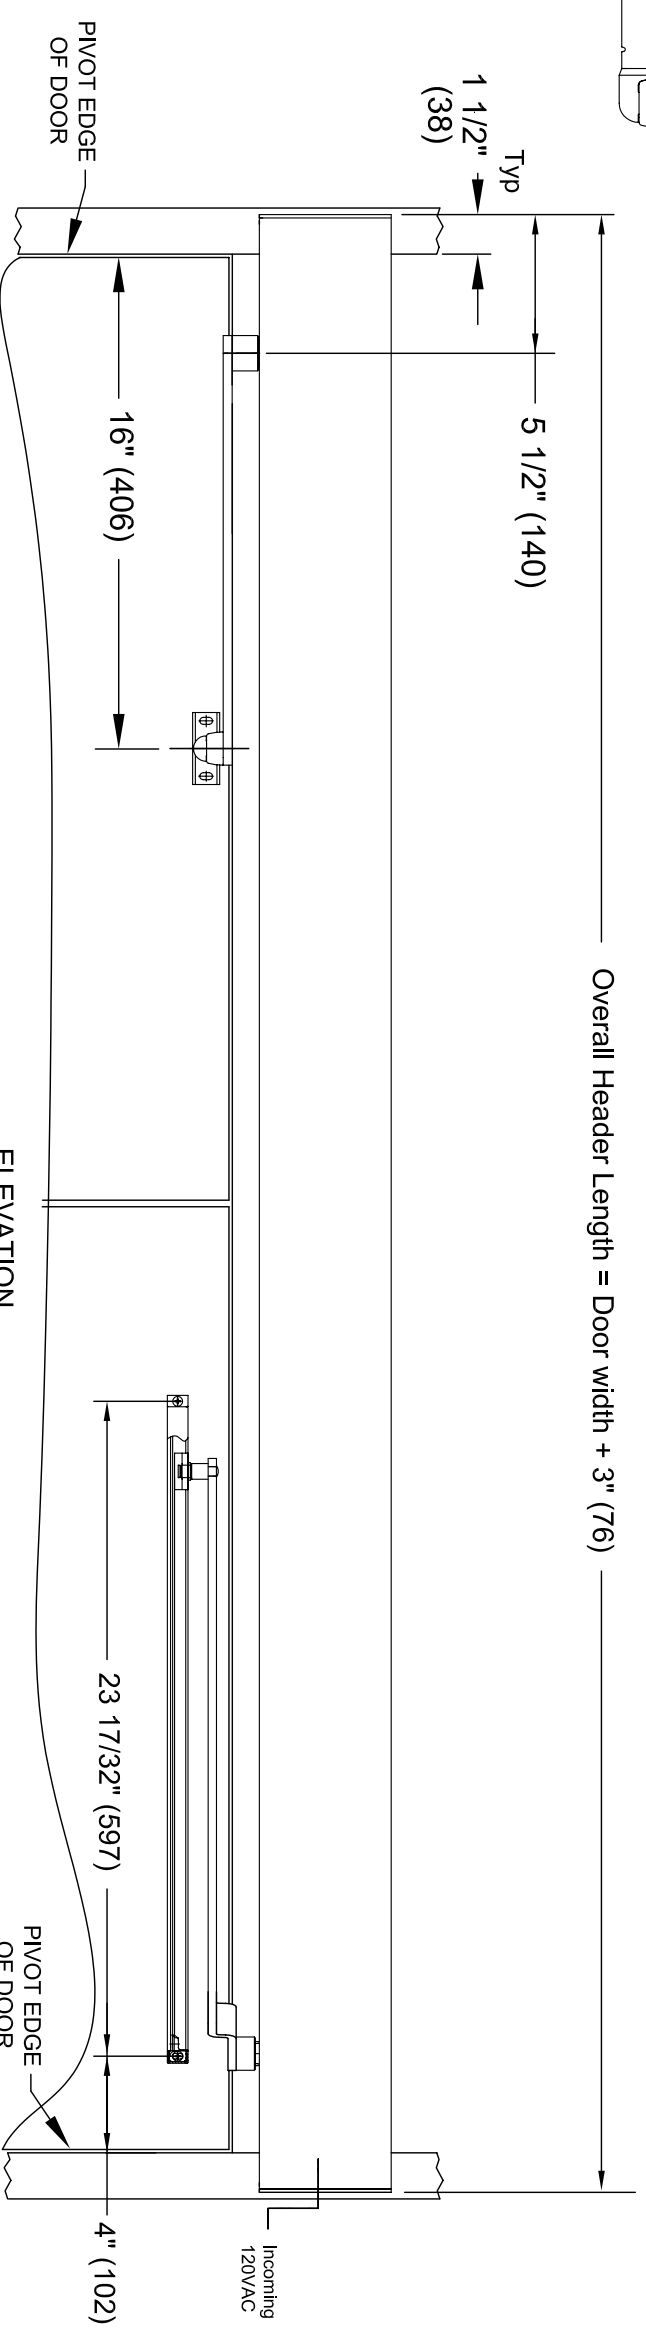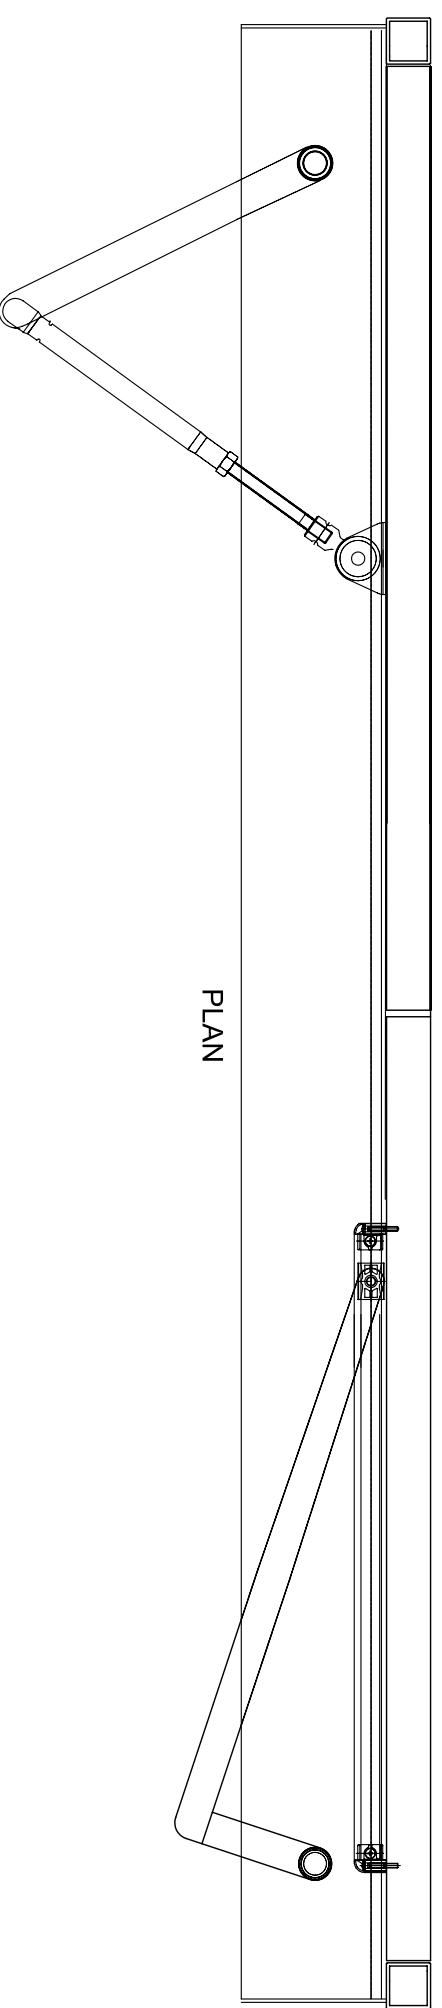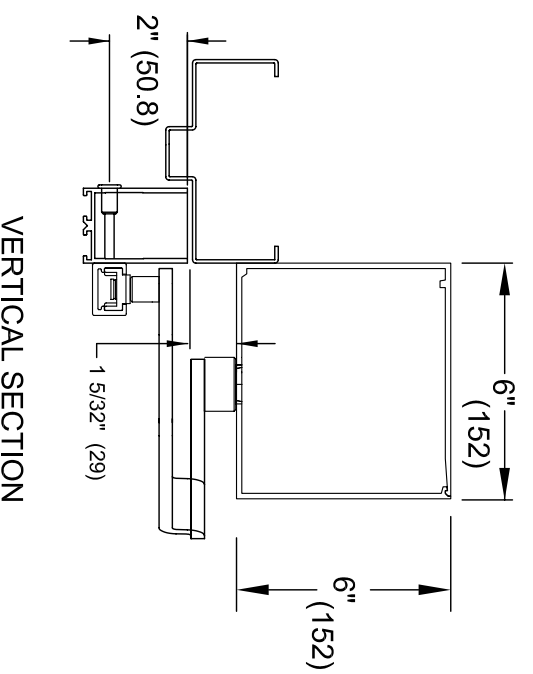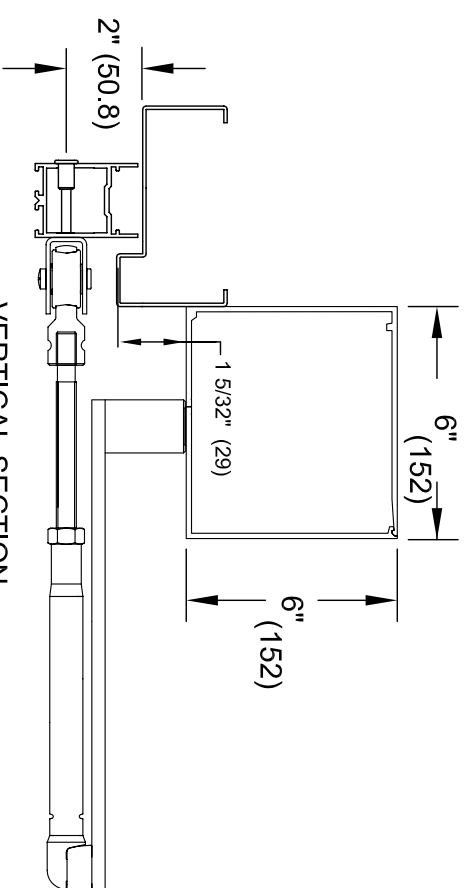

Note: Dimensions in () are mm

R.H. PULL, L.H. PUSH SHOWN, - L.H. PULL, R.H. PUSH OPPOSITE

AUTOMATIC SWINGING DOOR
 ED 400 SERIES - PAIR
 DOUBLE EGRESS
 ALUMINUM DOORS
 0" TO 6" REVEAL 3/22

