


# ProSlide™



## AUTOMATIC SLIDE DOOR SYSTEM



For the benchmark in performance and style the Horton Automatics ProSlide™ sets the mark.

SERIES 2003



### Innovative Features and Economical Performance

The **ProSlide™** premium automatic entrance system provides an excellent solution in high traffic entrance applications such as: supermarkets, retail stores, airports, shopping malls, hotels and hospitals. The system's clean lines, high performance and quiet operation compliment any décor or environment.

This premium automatic sliding entrance system features the diagnostic microprocessor control and heavy duty belt drive header system. The **ProSlide's™** doors and panels feature premium corner block construction. The system is engineered to provide long life and safe operation with heavier doors.

Horton Automatics has the largest factory trained and certified distribution team in the industry to support the installation and servicing of all your slide door entrances.

### Standard Features:

- ▶ Small header size (6x6 inch)
- ▶ Microprocessor control
- ▶ Encoder based operator
- ▶ 3/4" wide steel reinforced belt
- ▶ Emergency exit design
- ▶ Panel construction - heavy duty corner block design

### Specifier Options:

- ▶ Finish (Anodized aluminum, paint and metal clad)
- ▶ Configuration
- ▶ Overall dimensions
- ▶ Sensor packages
- ▶ Glazing options (1/4" to 1")

STANDARD PACKAGE DIMENSIONAL DATA					
	Unit Width	Maximum Slide Opening	Breakout Opening		
			Type 110	Type 310	
<b>Single Slide</b>	7'-0" (2134)	3'-0" (914)	3'-3 1/2" (1003)	6'-3"	(1905)
	8'-0" (2438)	3'-6" (1067)	3'-9 1/2" (1156)	7'-3"	(2210)
	8'-6" (2591)	3'-9" (1143)	4'-0 1/2" (1232)	7'-9"	(2362)
	9'-0" (2743)	4'-0" (1219)	4'-3 1/2" (1308)	8'-3"	(2515)
<b>Bi-part</b>	8'-0" (2438)	3'-0" (914)	3'-7" (1092)	6'-9 1/2"	(2070)
	9'-0" (2743)	3'-6" (1067)	4'-1" (1245)	7'-9 1/2"	(2375)
	10'-0" (3048)	4'-0" (1219)	4'-7" (1397)	8'-9 1/2"	(2680)
	12'-0" (3658)	5'-0" (1524)	5'-7" (1702)	10'-9 1/2"	(3289)
	14'-0" (4267)	6'-0" (1829)	6'-7" (2007)	12'-9 1/2"	(3899)
	16'-0" (4877)	7'-0" (2134)	7'-7" (2311)	14'-9 1/2"	(4509)




# ProSlide™


premium automatic entrance system is the solution in high traffic entrance applications.

## Type 110



The sliding panel (SX) slides to the exterior of the fixed sidelite (O) enabling it to swing out from any position of travel.

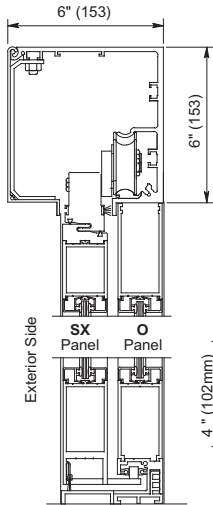

Vertical Section

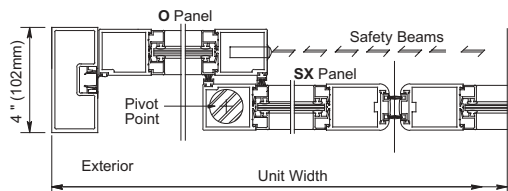

Horizontal Section

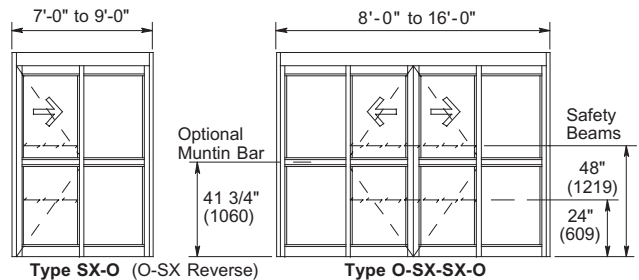


Floor Plans & Elevations


## Type 310

The sliding panel (SX) slides to the interior of a sidelite (SO) that will swing out.



The combination of both the sliding door and the sidelite swinging out creates a large opening to move wide objects.

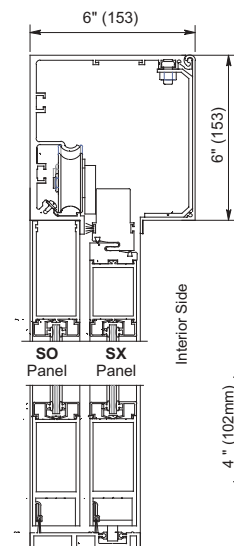

Vertical Section

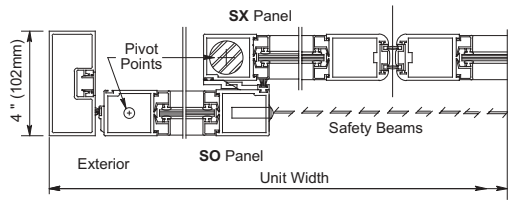

Horizontal Section

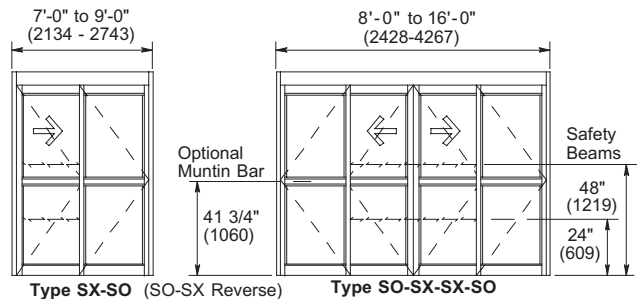

Floor Plans & Elevations



4242 Baldwin Boulevard  
Corpus Christi,  
Texas, U.S.A. 78405-3399  
Tel: 800-531-3111, 361-888-5591  
Fax: 800-531-3108, 361-888-6510  
[www.hortondors.com](http://www.hortondors.com)

Horton Automatics reserves the right to alter its product and specifications without notice.

**Horton Automatics, Ltd.**  
Unit A, Hortonwood 31  
Telford, Shropshire, England TF1-7YZ  
Tel: 01952 670169, Fax: 0192 670181  
International Tel: ++44-1952-670169  
International Fax: ++44-1952-670181



**Form A523**, Rev. 5/03  
© 1998 Horton Automatics  
Printed in U.S.A.