


NOTE : LHR-RHR (exterior swing) shown. For interior swing, specify LH-RH.

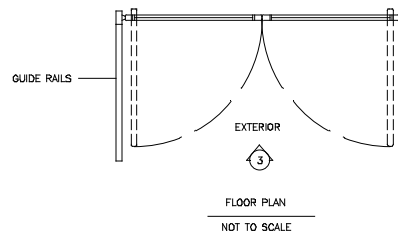

NOTE
Rough opening should allow
for 1/4" (5) minimum shim
at jambs and header.

File 4.057d1
Horton Series 4500
Complete Door/Overhead Concealed Operator
Package